


The market leading interactive touchscreen

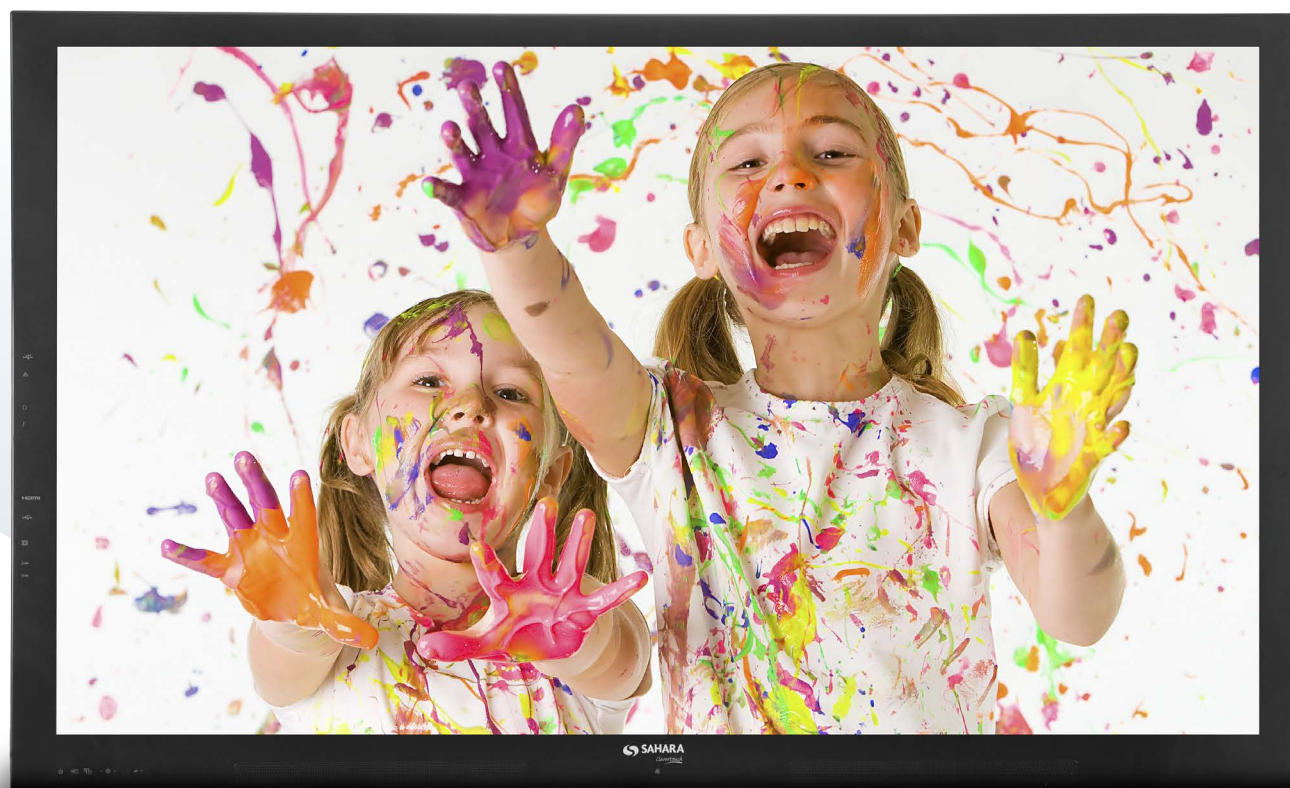

65" Clevertouch C Series

- Composite sleek design
- Optional PC features Intel® Core™ i3 Processor
- 4-point touch
- 3 year on-site de/re installation warranty in the UK

Software suite included:

CLEVERLYNX
Annotation software

 **DisplayNote**
Collaboration software

-  4 point touch
-  Anti reflective glass
-  65kg
-  Power consumption <350 watts
-  Integrated speakers 2 x 10W
-  High Definition
-  Durability
-  Plug and Play


Call: +44 (0)20 8319 7777 | Email: info@clevertouch.co.uk | or visit: clevertouch.co.uk

CLEVERTOUCH

The market leading interactive touchscreen

65" Clevertouch C Series

1540508

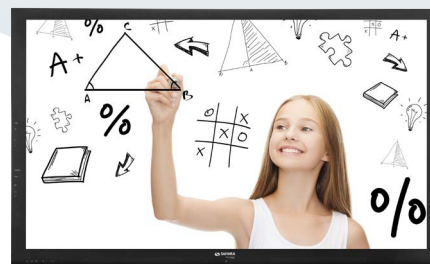

Display

| | |
|-------------------------------------|------------------|
| Diagonal size | 65inch |
| Glass type | Anti Reflective |
| Panel resolution | 1920 x 1080 |
| Native resolution | 1920 x 1080 |
| Brightness (nits) | 360 (typical) |
| Contrast ratio | 4000:1 (typical) |
| Response time (grey to grey) | 8ms |
| Aspect ratio | 16:9 |
| Display colours | 16.7M |
| Viewing angle horizontal / vertical | 178°/178° |
| Pixel pitch (mm) | 0.744 |
| Back light unit | LED |

Connectivity

| | |
|--------------------------|-------------|
| Video input (analogue) | VGA |
| Video input (digital) | HDMI |
| Video output (analogue) | |
| Audio input | ✓ |
| Speaker output | 2 x 10W |
| USB (for touch) | USB-B |
| USB (for media devices) | 2x 2.0 USB |
| Communication input port | RS485, RJ45 |

Features

| | | |
|----------|-------------------------|--|
| Video | Color temp. | 5700(warm), 6500(Warm), 9300(cool), USER |
| | Progressive scan | ✓ |
| Sound | Stereo | ✓ |
| | Output | 10W |
| | Built-in speakers | 10W x 2 |
| Function | Languages | English, Spanish, French, Dutch, Chinese(S), Chinese (T), Japanese. (Able to add new language, option) |
| | Auto ambience detection | ✗ |
| | IPC adaptation | ✗ |

Power

| | |
|-----------------------------------|-------------|
| Service and warranty | 3 years |
| Power consumption | < 350 watts |
| Power consumption in standby mode | < 0.5 watts |

Physical Specification

| | |
|---------------------------------|-----------------------------|
| Dimensions (not incl. stand) mm | 1562 (w) x 960 (h) x 93 (d) |
| Product weight | 65kg |
| VESA mount | 400 x 600 |
| Green approvals | Lead free, RoHS compliant |
| Regulatory approvals | CE/DoC |
| Thickness of toughened glass | 4mm |

Touch system

| | |
|-------------------------------|-------------------|
| Detection method | IR - 4 point |
| Touch tool | Stylus, Finger |
| Accuracy | ±4mm |
| Read speed | |
| Response time | <30ms |
| Effective screen size (w x h) | |
| Interface | USB 2.0 |
| Supported OS | Windows, Free Dos |
| Touch driver for Windows | 7 / 8 |
| Touch driver for Mac | N/A |
| Touch driver for Linux | N/A |

Accessories

| | |
|----------------------------|---|
| USB cable | ✓ |
| Power cable | ✓ |
| VGA cable | ✓ |
| HDMI cable | ✓ |
| Audio cable | ✓ |
| Remote control + batteries | ✓ |
| Stylus pen | ✓ |
| Pen tray | ✗ |
| User manual | ✓ |
| Driver disc | ✓ |